

ZSK1... Držák kabeľu


Informace:

POUŽITIE

Vešanie káblov alebo trubiek na otvorené profily.

MATERIÁL

Zinkovaný pružný oceľový plech.

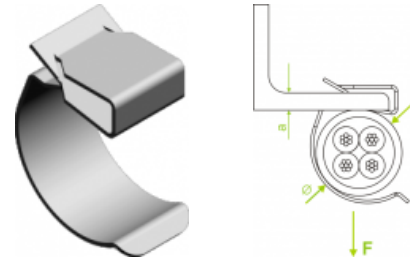


Verze:

Tloušťka plechu: 1,0 mm

Symbol	Kat. číslo	Množ./bal.	Tloušťka a	Průměr Ø min.	Průměr Ø max.
ZSK1Ø6/2	792901	100	2-4	6	7
ZSK1Ø7/2	793001	100	2-4	7	8
ZSK1Ø8/2	793101	100	2-4	8	9
ZSK1Ø9/2	793201	100	2-4	9	10
ZSK1Ø10/2	793301	100	2-4	10	11
ZSK1Ø12/2	793401	100	2-4	12	14
ZSK1Ø15/2	793501	100	2-4	15	18
ZSK1Ø19/2	793601	100	2-4	19	24
ZSK1Ø25/2	793701	100	2-4	25	32
ZSK1Ø6/4	793801	100	4-7	6	7
ZSK1Ø7/4	793901	100	4-7	7	8
ZSK1Ø8/4	794001	100	4-7	8	9
ZSK1Ø9/4	794101	100	4-7	9	10
ZSK1Ø10/4	794201	100	4-7	10	11
ZSK1Ø12/4	794301	100	4-7	12	14
ZSK1Ø15/4	794401	100	4-7	15	18
ZSK1Ø19/4	794501	100	4-7	19	24
ZSK1Ø25/4	794601	100	4-7	25	32
ZSK1Ø6/8	794701	100	8-12	6	7
ZSK1Ø7/8	794801	100	8-12	7	8
ZSK1Ø8/8	794901	100	8-12	8	9
ZSK1Ø9/8	795001	100	8-12	9	10
ZSK1Ø10/8	795101	100	8-12	10	11
ZSK1Ø12/8	795201	100	8-12	12	14
ZSK1Ø15/8	795301	100	8-12	15	18
ZSK1Ø19/8	795401	100	8-12	19	24
ZSK1Ø25/8	795501	100	8-12	25	32

Související produkty:

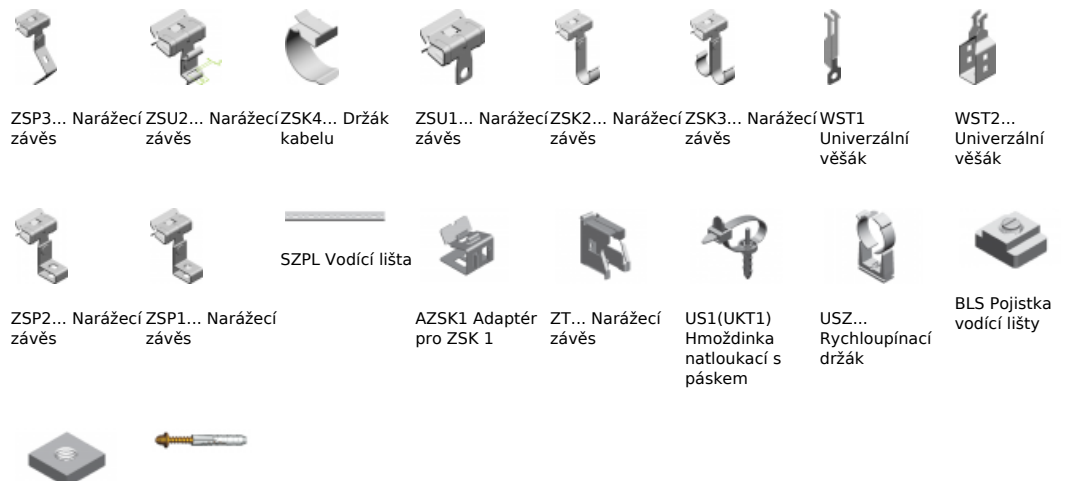

NMU Matice
montážní

SDD
Dvojzávitové
šroub s
hmoždinkou



PD11 Distanční
podložka