

LDC...H100N 90° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK - rung cross-section Cable Ladder DU - rung cross-section

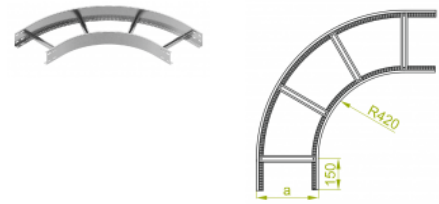

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LDC100H100N	100	499610	2	5,05
LDC200H100N	200	499620	2	5,90
LDC300H100N	300	499630	2	6,74
LDC400H100N	400	499640	2	7,58
LDC500H100N	500	499650	2	8,43
LDC600H100N	600	499660	2	9,28