

KKBJ...H42 90° Horizontal Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

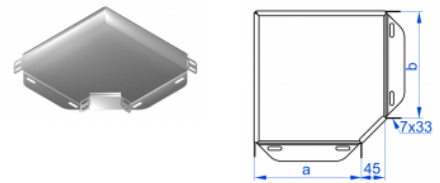

**For installation use Screw Sets SGK M6×10 or SG M6×10.
In case of special orders please specify dimensions a and b.**

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKBJ50H42	50	140102	20	0,16
KKBJ100H42	100	140302	20	0,27
KKBJ150H42	150	140502	10	0,52
KKBJ200H42	200	140602	10	0,66
KKBJ300H42	300	140802	10	1,24
KKBJ400H42	400	147102	10	1,60
KKBJ500H42	500	147202	10	2,05
KKBJ600H42	600	147302	10	2,60

Connected products:

