


## KKML...H42 45° Horizontal Bend

### Overview:

**Application**  
Diversion in cable routing.

**Material**  
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**  
**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)  
**E-** stainless steel (SS)  
**L-** powder coating in a full range of colours (PC)

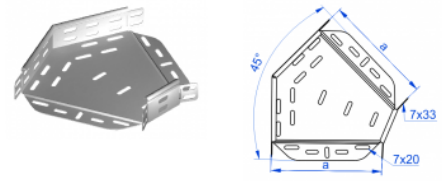

**For installation use Screw Sets SGK M6×10 or SG M6×10.**

### Versions:

Sheet thickness: **0,7 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKML50H42	50	145905	20	0,08
KKML100H42	100	145910	20	0,13
KKML150H42	150	145915	10	0,22
KKML200H42	200	145920	10	0,31
KKML300H42	300	145930	10	0,59

### Connected products:

