


KKMJ...H42 45° Horizontal Bend

Overview:

Application
Diversion in cable routing.

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

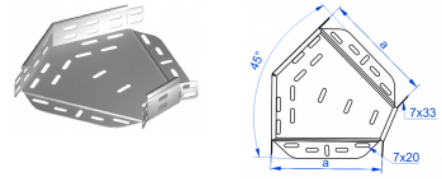

For installation use Screw Sets SGK M6×10 or SG M6×10.

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKMJ50H42	50	146005	20	0,11
KKMJ100H42	100	146010	20	0,19
KKMJ150H42	150	146015	10	0,36
KKMJ200H42	200	146020	10	0,50
KKMJ300H42	300	146030	10	0,87
KKMJ400H42	400	146040	10	1,04
KKMJ500H42	500	146050	10	1,22
KKMJ600H42	600	146060	10	1,39

Connected products:

