


## KKMBL...H42 45° Horizontal Bend

### Overview:

**Application**  
Diversion in cable routing.

**Material**  
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**  
**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)  
**E-** stainless steel (SS)  
**L-** powder coating in a full range of colours (PC)

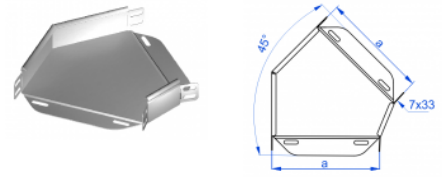

**For installation use Screw Sets SGK M6×10 or SG M6×10.**

### Versions:

Sheet thickness: **0,7 mm**

| Symbol      | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|-------------|--------------|------------------|-----------------|--------------|
| KKMBL50H42  | 50           | 140103           | 20              | 0,08         |
| KKMBL100H42 | 100          | 140303           | 20              | 0,13         |
| KKMBL150H42 | 150          | 140503           | 10              | 0,22         |
| KKMBL200H42 | 200          | 140603           | 10              | 0,31         |
| KKMBL300H42 | 300          | 140803           | 10              | 0,59         |

### Connected products:

