

BDC...N Ladder Side

Overview:

Application

Used in DIY install of cable ladders together with the rungs; at limited-access locations.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

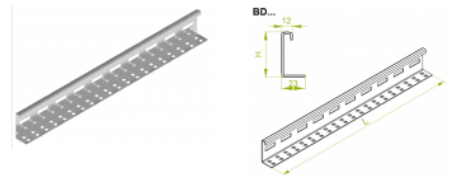

IMPORTANT! Cut-to-length service available upon 2m long sections of cable ladder side walls.

Versions:

Sheet thickness: **2,0 mm**

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight [1m]
BDCH45/3N	3000	440502	1	45	1,08
BDCH45/6N	6000	440602	1	45	1,08
BDCH50/3N	3000	450502	1	50	1,15
BDCH50/6N	6000	450602	1	50	1,15
BDCH60/3N	3000	460502	1	60	1,30
BDCH60/6N	6000	460602	1	60	1,30
BDCH80/3N	3000	480502	1	80	1,58
BDCH80/6N	6000	480602	1	80	1,58
BDCH100/3N	3000	410502	1	100	1,87
BDCH100/6N	6000	410602	1	100	1,87
BDCH120/3N	3000	490202	1	120	2,06
BDCH120/6N	6000	490302	1	120	2,06