

LUBJ...H42 90° Vertical Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

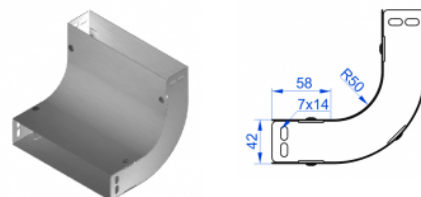

For installation use Screw Sets SGK M6×10 or SG M6×10 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LUBJ50H42	50	141701	2	0,52
LUBJ100H42	100	141901	2	0,80
LUBJ150H42	150	142101	2	1,10
LUBJ200H42	200	142201	2	1,36
LUBJ300H42	300	142401	2	1,92
LUBJ400H42	400	147701	2	2,20
LUBJ500H42	500	147801	2	2,64
LUBJ600H42	600	147901	2	3,03

Connected products:



KAJ...H42 Cable Tray KGL...H42 Cable Tray KGJ...H42 Cable Tray KGR...H42 Cable Tray KCJ...H42 Cable Tray KCL...H42 Cable Tray KOL...H42 Cable Tray KOJ...H42 Cable Tray



KBR...H42 Cable Tray KBL...H42 Cable Tray KBJ...H42 Cable Tray SG... Screw Set SM... Screw Set