

SSH... Rung

Overview:

Application

Used for Cable Ladders DDH, in combination with Cable Clamp UK to install electrical cables.

Material


Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

L- powder coating in a full range of colours (PC)

To install use 4 sets of Screws SGF M10×30

Sheet thickness: 2,5 mm

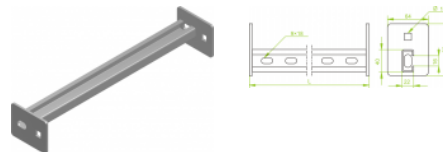

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Weight 1 pc.
SSH 200	153	404120	20	0,59
SSH 300	253	404130	20	0,76
SSH 400	353	404140	10	0,93
SSH 500	453	404150	10	1,11
SSH 600	553	404160	10	1,28
SSH 700	653	404170	4	1,45
SSH 800	753	404180	4	1,63
SSH 900	853	404190	4	1,80
SSH1000	953	404111	4	1,97

Connected products:



DM...H55 Vertical Cable Ladder



DSH...H80 Vertical Cable Ladder



DDH...H80 Vertical Cable Ladder