

KN Underfloor Trunking

Overview:

Application

Routing underfloor cable runs

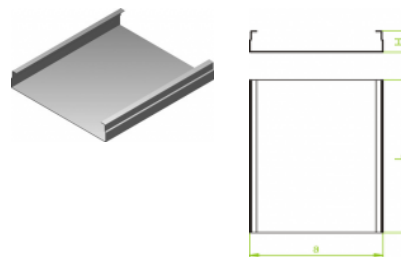
Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)






Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KN 175H28/2	2000	175	520117	6	2,08	4700
KN 175H28/3	3000	175	520217	6	2,08	4700
KN 190H28/2	2000	190	520119	6	2,20	5120
KN 190H28/3	3000	190	520219	6	2,20	5120
KN 240H28/2	2000	240	520124	6	2,60	6520
KN 240H28/3	3000	240	520224	6	2,60	6520
KN 340H28/2	2000	340	520134	4	3,40	9320
KN 340H28/3	3000	340	520234	4	3,40	9320

Connected products:

							
KNd Underfloor Trunking 2 Comp.	KNt Underfloor Trunking 3 Comp.	KKN 90° Horizontal Bend	KKNd 90° Horizontal Bend 2 Comp.	KKNt 90° Horizontal Bend 3 Comp.	KKNM 45° Horizontal Bend	KKNMd 45° Horizontal Bend 2 Comp.	KKNMt 45° Horizontal Bend 3 Comp.
							
TKN Horizontal Tee	CZKN Horizontal Cross-over	LK Vertical Bend	LKd Vertical Bend 2 Comp.	LKt Vertical Bend 3 Comp.	RKN Straight Reducer	RKNd Straight Reducer 2 Comp.	RKNT Straight Reducer 3 Comp.