

KNd Underfloor Trunking 2 Comp.

Overview:


Application

Routing underfloor cable runs

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

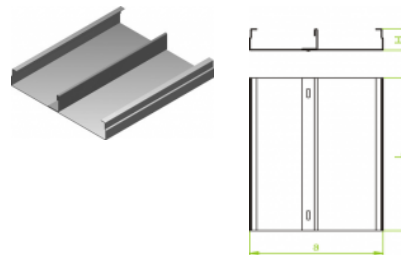
E- stainless steel (SS)


Versions:


 Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KNd 175H28/2	2000	175	520317	6	2,55	4700
KNd 175H28/3	3000	175	520417	6	2,55	4700
KNd 190H28/2	2000	190	520319	6	2,67	5120
KNd 190H28/3	3000	190	520419	6	2,67	5120
KNd 240H28/2	2000	240	520324	6	3,07	6520
KNd 240H28/3	3000	240	520424	6	3,07	6520
KNd 340H28/2	2000	340	520334	4	3,87	9320
KNd 340H28/3	3000	340	520434	4	3,87	9320

Connected products:



KN Underfloor Trunking



KNt Underfloor Trunking 3 Comp.



KKN 90° Horizontal Bend



KKNd 90° Horizontal Bend 2 Comp.



KKNt 90° Horizontal Bend 3 Comp.



KKNM 45° Horizontal Bend



KKNMd 45° Horizontal Bend 2 Comp.



KKNMt 45° Horizontal Bend 3 Comp.



TKN Horizontal Tee



CZKN Horizontal Cross-over



LK Vertical Bend



LKd Vertical Bend 2 Comp.



LKt Vertical Bend 3 Comp.



RKN Straight Reducer



RKNd Straight Reducer 2 Comp.



RKNt Straight Reducer 3 Comp.