

KNt Underfloor Trunking 3 Comp.

Overview:

Application

Routing underfloor cable runs

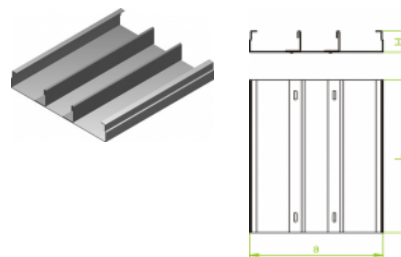
Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)





Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KNt 175H28/2	2000	175	520517	6	3,02	4700
KNt 175H28/3	3000	175	520617	6	3,02	4700
KNt 190H28/2	2000	190	520519	6	3,14	5120
KNt 190H28/3	3000	190	520619	6	3,14	5120
KNt 240H28/2	2000	240	520524	6	3,54	6520
KNt 240H28/3	3000	240	520624	6	3,54	6520
KNt 340H28/2	2000	340	520534	4	4,34	9320
KNt 340H28/3	3000	340	520634	4	4,34	9320

Connected products:

							
KN Underfloor Trunking	KNd Underfloor Trunking 2 Comp.	KKN 90° Horizontal Bend	KKNd 90° Horizontal Bend 2 Comp.	KKNt 90° Horizontal Bend 3 Comp.	KKNM 45° Horizontal Bend	KKNMd 45° Horizontal Bend 2 Comp.	KKNMt 45° Horizontal Bend 3 Comp.
							
TKN Horizontal Tee	CZKN Horizontal Cross-over	LK Vertical Bend	LKd Vertical Bend 2 Comp.	LKt Vertical Bend 3 Comp.	RKN Straight Reducer	RKNd Straight Reducer 2 Comp.	RKNT Straight Reducer 3 Comp.