

KKNMd 45° Horizontal Bend 2 Comp.

Overview:

Application

Diversion in cable routing

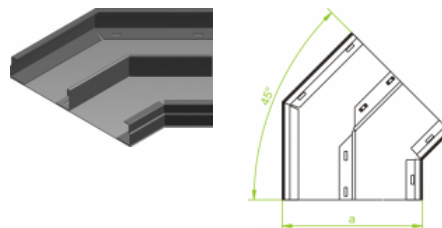
Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)





Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKNMd175H28	175	521117	4	0,60
KKNMd190H28	190	521119	4	0,66
KKNMd240H28	240	521124	4	0,85
KKNMd340H28	340	521134	4	1,36

Connected products:

							
KN Underfloor Trunking	KNd Underfloor Trunking 2 Comp.	KNt Underfloor Trunking 3 Comp.	KKN 90° Horizontal Bend	KKNd 90° Horizontal Bend 2 Comp.	KKNt 90° Horizontal Bend 3 Comp.	KKNM 45° Horizontal Bend	KKNMt 45° Horizontal Bend 3 Comp.
							
TKN Horizontal Tee	CZKN Horizontal Cross-over	LK Vertical Bend	LKd Vertical Bend 2 Comp.	LKt Vertical Bend 3 Comp.	RKN Straight Reducer	RKNd Straight Reducer 2 Comp.	RKNt Straight Reducer 3 Comp.