


## LUMBJ...H42 45° Vertical Bend

### Overview:

**Application**  
Diversion in cable routing.

**Material**  
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**  
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)  
E- stainless steel (SS)  
L- powder coating in a full range of colours (PC)

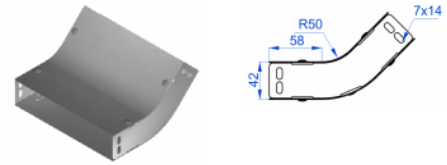


**For installation use Screw Sets SGK M6×10 or SG M6×10 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling**

### Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LUMBJ50H42	50	141702	2	0,35
LUMBJ100H42	100	141902	2	0,55
LUMBJ150H42	150	142102	2	0,76
LUMBJ200H42	200	142202	2	0,95
LUMBJ300H42	300	142402	2	1,33
LUMBJ400H42	400	147702	2	1,53
LUMBJ500H42	500	147802	2	1,83
LUMBJ600H42	600	147902	2	2,10

### Connected products:

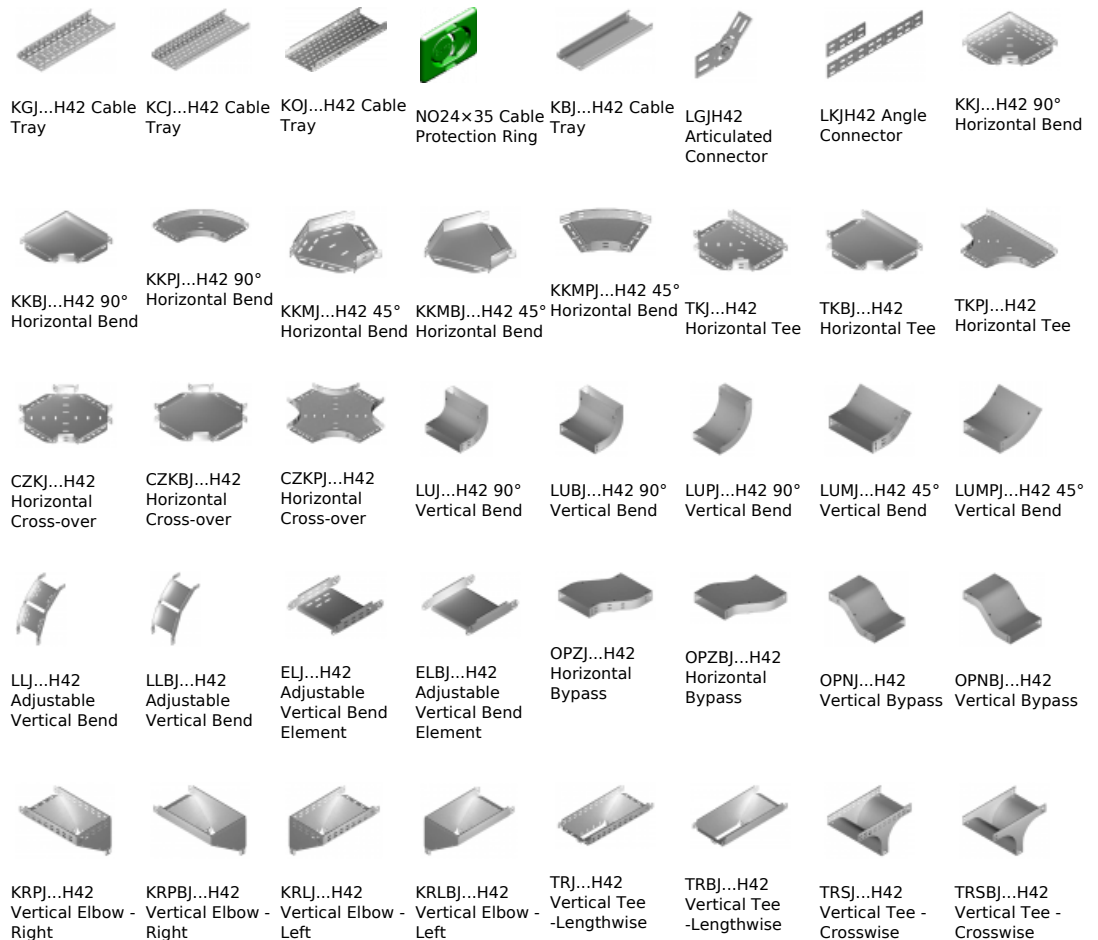

RKLJ...H42 Left  
ReducerRKLBJ...H42 Left  
ReducerRKPJ...H42 Right  
ReducerRKPBJ...H42  
Right ReducerRKSJ...H42  
Straight  
ReducerRKSBJ...H42  
Straight  
ReducerLRJH42 Corner  
ConnectorLRBH42 Corner  
ConnectorTKDJ...H42  
Add-on TeeLRPJH42 Corner  
ConnectorLRPPH42 Corner  
Connector