

LKd Vertical Bend 2 Comp.

Overview:

Application

Diversion in cable routing from the horizontal to the vertical plane

Material

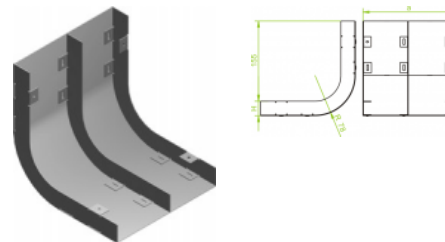
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

Cover included






Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LKd175H28	175	521617	4	0,70
LKd190H28	190	521619	4	0,74
LKd240H28	240	521624	4	0,88
LKd340H28	340	521634	4	1,14

Connected products:

							
KN Underfloor Trunking	KNd Underfloor Trunking 2 Comp.	KNt Underfloor Trunking 3 Comp.	KKN 90° Horizontal Bend	KKNd 90° Horizontal Bend 2 Comp.	KKNt 90° Horizontal Bend 3 Comp.	KKNM 45° Horizontal Bend	KKNMd 45° Horizontal Bend 2 Comp.
							
KKNMt 45° Horizontal Bend 3 Comp.	TKN Horizontal Tee	CZKN Horizontal Cross-over	LK Vertical Bend	LKt Vertical Bend 3 Comp.	RKN Straight Reducer	RKNd Straight Reducer 2 Comp.	RKNt Straight Reducer 3 Comp.