

LLL...H42 Adjustable Vertical Bend

Overview:

Application

Diversions in cable routing. Full-range angle adjustment with a lock.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

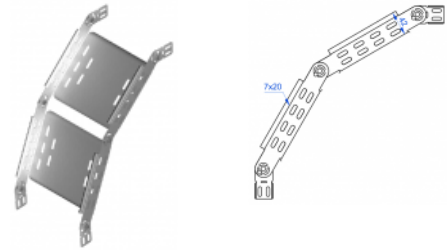

For installation use Screw Sets SGK M6×10 or SG M6×10.

Adjustable Vertical Bend is delivered fully assembled

together with:

2 Adjustable Vertical Bend Elements

4 pairs of Angle Connectors

6 sets of screws

Versions:

Sheet thickness: **0,7 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLL50H42	50	143105	2	0,54
LLL100H42	100	143110	2	0,66
LLL150H42	150	143115	2	0,76
LLL200H42	200	143120	2	0,92
LLL300H42	300	143130	2	1,16

Connected products:

