

KN Underfloor Trunking

Overview:

Application

Routing underfloor cable runs

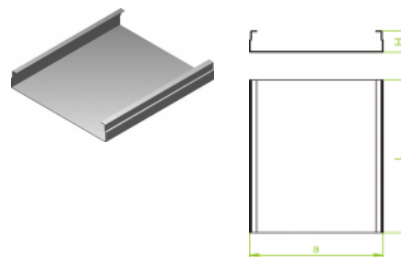
Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)





Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KN 175H38/2	2000	175	530117	6	2,24	6450
KN 175H38/3	3000	175	530217	6	2,24	6450
KN 190H38/2	2000	190	530119	6	2,36	7020
KN 190H38/3	3000	190	530219	6	2,36	7020
KN 240H38/2	2000	240	530124	6	2,76	8920
KN 240H38/3	3000	240	530224	6	2,76	8920
KN 340H38/2	2000	340	530134	4	3,56	12720
KN 340H38/3	3000	340	530234	4	3,56	12720

Connected products:

							
LKT Vertical Bend 3 Comp.	RKN Straight Reducer	RKNd Straight Reducer 2 Comp.	RKNt Straight Reducer 3 Comp.	KNd Underfloor Trunking 2 Comp.	KNt Underfloor Trunking 3 Comp.	KKN 90° Horizontal Bend	KKNd 90° Horizontal Bend 2 Comp.
							
KKNt 90° Horizontal Bend 3 Comp.	KKNM 45° Horizontal Bend	KKNMd 45° Horizontal Bend 2 Comp.	KKNMt 45° Horizontal Bend 3 Comp.	TKN Horizontal Tee	CZKN Horizontal Cross-over	LKT Vertical Bend	LKTd Vertical Bend 2 Comp.