

KKNM 45° Horizontal Bend

Overview:

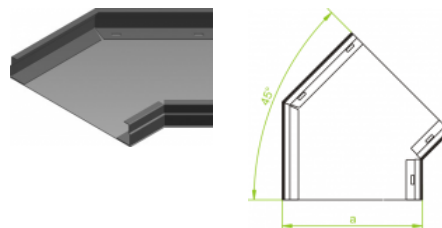
Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)


Versions:

 Sheet thickness: **1,0 mm**




Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKNM175H38	175	531017	4	0,59
KKNM190H38	190	531019	4	0,65
KKNM240H38	240	531024	4	0,83
KKNM340H38	340	531034	4	1,31

Connected products:


 LKt Vertical
Bend 3 Comp.

 RKN Straight
Reducer

 RKNd Straight
Reducer 2
Comp.

 RKNt Straight
Reducer 3
Comp.

 KN Underfloor
Trunking

 KNd Underfloor
Trunking 2
Comp.

 KNT Underfloor
Trunking 3
Comp.

 KKN 90°
Horizontal Bend

 KKNd 90°
Horizontal Bend
2 Comp.

 KKNt 90°
Horizontal Bend
3 Comp.

 KKNMd 45°
Horizontal Bend
2 Comp.

 KKNMt 45°
Horizontal Bend
3 Comp.

 TKN Horizontal
Tee

 CZKN Horizontal
Cross-over


LK Vertical Bend


 LKd Vertical
Bend 2 Comp.