

LK Vertical Bend

Overview:

Application

Diversion in cable routing from the horizontal to the vertical plane

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

Cover included

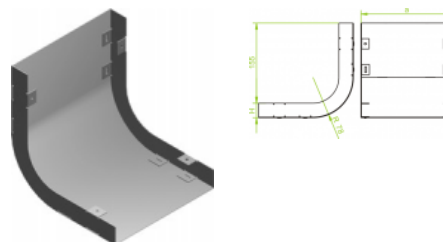

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LK 175H38	175	531517	4	0,70
LK 190H38	190	531519	4	0,75
LK 240H38	240	531524	4	0,89
LK 340H38	340	531534	4	1,16

Connected products:



LKt Vertical Bend 3 Comp.




RKN Straight Reducer




RKNd Straight Reducer 2 Comp.




RKNt Straight Reducer 3 Comp.



KN Underfloor Trunking



KNd Underfloor Trunking 2 Comp.



KNT Underfloor Trunking 3 Comp.



KKN 90° Horizontal Bend



KKNd 90° Horizontal Bend 2 Comp.



KKNt 90° Horizontal Bend 3 Comp.




KKNM 45° Horizontal Bend



KKNMd 45° Horizontal Bend 2 Comp.



KKNMt 45° Horizontal Bend 3 Comp.



TKN Horizontal Tee



CZKN Horizontal Cross-over



LKd Vertical Bend 2 Comp.