


KN Underfloor Trunking

Overview:

Application
Routing underfloor cable runs

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)

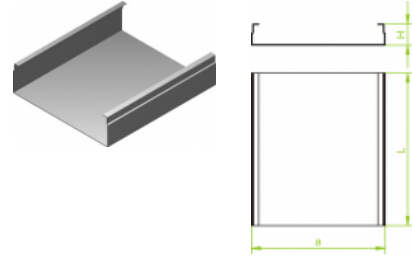

Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KN 175H48/2	2000	175	540117	6	2,40	8200
KN 175H48/3	3000	175	540217	6	2,40	8200
KN 190H48/2	2000	190	540119	6	2,52	8920
KN 190H48/3	3000	190	540219	6	2,52	8920
KN 240H48/2	2000	240	540124	6	2,92	11320
KN 240H48/3	3000	240	540224	6	2,92	11320
KN 340H48/2	2000	340	540134	4	3,72	16120
KN 340H48/3	3000	340	540234	4	3,72	16120

Connected products:

