


KNd Underfloor Trunking 2 Comp.

Overview:

Application
Routing underfloor cable runs

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)

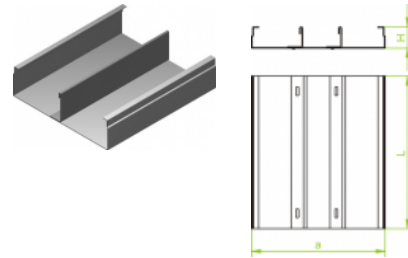

Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KNd 175H48/2	2000	175	540317	6	3,02	8200
KNd 175H48/3	3000	175	540417	6	3,02	8200
KNd 190H48/2	2000	190	540319	6	3,14	8920
KNd 190H48/3	3000	190	540419	6	3,14	8920
KNd 240H48/2	2000	240	540324	6	3,54	11320
KNd 240H48/3	3000	240	540424	6	3,54	11320
KNd 340H48/2	2000	340	540334	4	4,34	16120
KNd 340H48/3	3000	340	540434	4	4,34	16120

Connected products:

