

## KKNM 45° Horizontal Bend

### Overview:

**Application**

Diversion in cable routing


**Material**

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

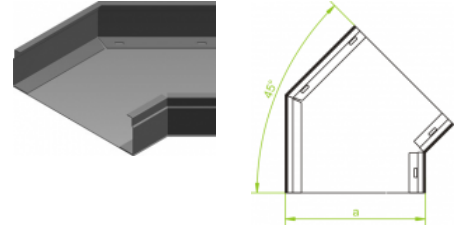

### Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
<b>KKNM 175H48</b>	<b>175</b>	<b>541017</b>	<b>4</b>	<b>0,64</b>
<b>KKNM 190H48</b>	<b>190</b>	<b>541019</b>	<b>4</b>	<b>0,71</b>
<b>KKNM 240H48</b>	<b>240</b>	<b>541024</b>	<b>4</b>	<b>0,89</b>
<b>KKNM 340H48</b>	<b>340</b>	<b>541034</b>	<b>4</b>	<b>1,39</b>

### Connected products:

