

KKNM 45° Horizontal Bend

Overview:

Application

Diversion in cable routing

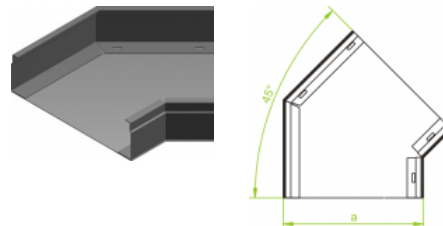
Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)






Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKNM 175H48	175	541017	4	0,64
KKNM 190H48	190	541019	4	0,71
KKNM 240H48	240	541024	4	0,89
KKNM 340H48	340	541034	4	1,39

Connected products:

							
KN Underfloor Trunking	KNd Underfloor Trunking 2 Comp.	KNt Underfloor Trunking 3 Comp.	KKN 90° Horizontal Bend	KKNd 90° Horizontal Bend 2 Comp.	KKNt 90° Horizontal Bend 3 Comp.	KKNMd 45° Horizontal Bend 2 Comp.	KKNMt 45° Horizontal Bend 3 Comp.
							
TKN Horizontal Tee	CZKN Horizontal Cross-over	LK Vertical Bend	LKd Vertical Bend 2 Comp.	LKt Vertical Bend 3 Comp.	RKN Straight Reducer	RKNd Straight Reducer 2 Comp.	RKNt Straight Reducer 3 Comp.