

LKd Vertical Bend 2 Comp.

Overview:

Application

Diversion in cable routing from the horizontal to the vertical plane

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

Cover included

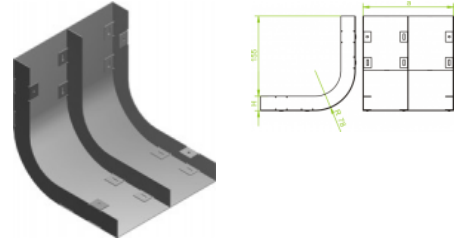


Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LKd 175H48	175	541617	4	0,92
LKd 190H48	190	541619	4	0,87
LKd 240H48	240	541624	4	1,11
LKd 340H48	340	541634	4	1,40

Connected products:



KN Underfloor Trunking



KNd Underfloor Trunking 2 Comp.




KNt Underfloor Trunking 3 Comp.




KKN 90° Horizontal Bend



KKNd 90° Horizontal Bend 2 Comp.




KKNt 90° Horizontal Bend 3 Comp.



KKNM 45° Horizontal Bend



KKNMd 45° Horizontal Bend 2 Comp.



KKNMt 45° Horizontal Bend 3 Comp.



TKN Horizontal Tee



CZKN Horizontal Cross-over



LK Vertical Bend



LKt Vertical Bend 3 Comp.



RKN Straight Reducer



RKNd Straight Reducer 2 Comp.



RKNt Straight Reducer 3 Comp.