

## OK Fastening Clamp

### Overview:

**Application**

Double-sided trunking installation to the base.


**Material**

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

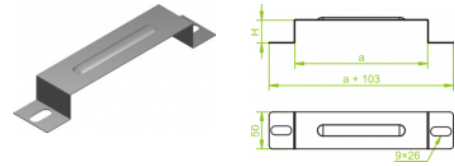

### Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
OK 175H28	177	523017	50	30	0,12
OK 175H38	177	533017	50	40	0,13
OK 175H48	177	543017	50	50	0,14
OK 190H28	192	523019	50	30	0,13
OK 190H38	192	533019	50	40	0,14
OK 190H48	192	543019	50	50	0,15
OK 240H28	242	523024	50	30	0,15
OK 240H38	242	533024	50	40	0,16
OK 240H48	242	543024	50	50	0,17
OK 340H28	342	523034	50	30	0,19
OK 340H38	342	533034	50	40	0,20
OK 340H48	342	543034	50	50	0,21

### Connected products:

