

LM Fastening Clamp

Overview:

Application

Trunking installation to the base.


Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

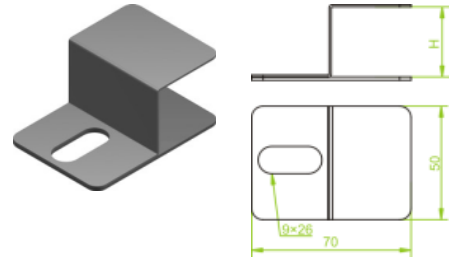

Versions:

Sheet thickness: **1,0 mm**

Symbol	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
LM 28	520100	100	30	0,03
LM 38	530100	100	40	0,04
LM 48	540100	100	50	0,04

Connected products:

