


## KKMJ...H30 45° Horizontal Bend

### Overview:

**Application**  
Diversion in cable routing.

**Material**  
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**  
**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)  
**E-** stainless steel (SS)  
**L-** powder coating in a full range of colours (PC)

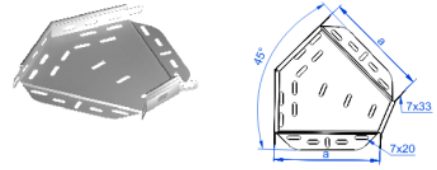

For installation use Screw Sets **SGK M6×10** or **SG M6×10**.

### Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
<b>KKMJ50H30</b>	<b>50</b>	<b>131605</b>	<b>20</b>	<b>0,09</b>
<b>KKMJ100H30</b>	<b>100</b>	<b>131610</b>	<b>20</b>	<b>0,16</b>
<b>KKMJ150H30</b>	<b>150</b>	<b>131615</b>	<b>10</b>	<b>0,34</b>
<b>KKMJ200H30</b>	<b>200</b>	<b>131620</b>	<b>10</b>	<b>0,39</b>
<b>KKMJ300H30</b>	<b>300</b>	<b>131630</b>	<b>10</b>	<b>0,76</b>

### Connected products:



KGL...H30 Cable Tray



KGR...H30 Cable Tray



KBJ...H30 Cable Tray



KBR...H30 Cable Tray



KKMJ...H30 Cable Tray