

PTP20... Perforated Steel Band

Overview:

Application

Suspending installation components, installing all range of cable grips. Used as an earthing element indoors


Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

L- powder coating in a full range of colours to 3m long (PC)

Important! In case of large quantity orders cut-to-length services available for any sections up to 6m long.

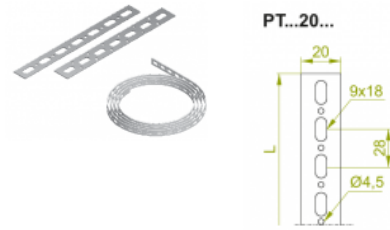

Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Maximum load F _{max} [kN]	Weight [1m]	Dĺžka rolky [m]
PTP20/25	20	641025	1,00	0,18	25
PTP20/50	20	641050	1,00	0,18	50

Connected products:

CWZP30H20... Support Channel	CWZP40H22... Support Channel	CWZP40H47... Support Channel	PLP... Perforated Steel Strip	PZC... Assembly Plate	NO40x20 Protective Cap	CWP40H35... Support Channel	LCW40H35 Channel Connector
LCW40H47 Channel Connector	LCM50H30 Channel Connector	NO40x47 Protective Cap	CP28H12... Channel	CP40H20... Channel	LC40H20 Channel Connector	CMP40H22... Support Channel	KTP25H25... Angle Profile
KTP35H35... Angle Profile	NOK... Protective Cap	NO80x37 Protective Cap	CWP30H30... Support Channel	LCW30H30 Channel Connector	LCM40H40 Channel Connector	TSO... Galvanised Steel Tape	DSO... Galvanised Steel Wire
NO30x30 Protective Cap	NO40x40N Protective Cap	NO40x60 Protective Cap	DPH... I-Beam	NO40x30 Protective Cap	NO50x30 Protective Cap	LCM40H60 Channel Connector	LCM50H50 Channel Connector