


PTF... Perforated Steel Band

Overview:

Application
Suspending installation components, installing all range of cable grips. Used as an earthing element indoors

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
L- powder coating in a full range of colours to 3m long (PC)

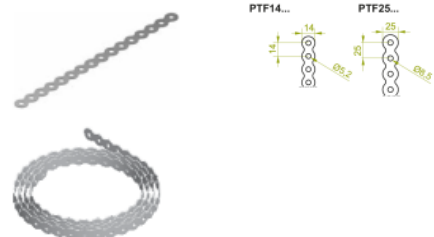

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Maximum load Fmax[kN]	Weight [1m]	Dĺžka rolky [m]
PTF14/25	14	641125	0,30	0,07	25
PTF14/50	14	641150	0,30	0,07	50
PTF25/25	25	641225	0,60	0,12	25
PTF25/50	25	641250	0,60	0,12	50

Connected products:

