

ELBL...H42 Adjustable Vertical Bend Element

Overview:

Application

Diversions in cable routing. Full-range angle adjustment with a lock.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

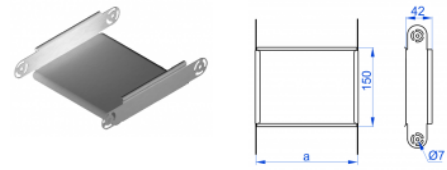

For installation use Screw Sets SGK M6×10 or SG M6×10.

Possibility of creating adjustable vertical bends of any internal radius through adding up bend elements

Versions:

Sheet thickness: **0,7 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
ELBL50H42	50	142503	4	0,19
ELBL100H42	100	142703	4	0,25
ELBL150H42	150	142903	4	0,30
ELBL200H42	200	143003	4	0,38
ELBL300H42	300	143203	4	0,50

Connected products:

