

## CD28H12... Channel

### Overview:

#### Application

Used for suspending lighting, and as construction element for installing cable trays, and ladders. Used as an element for supporting Brackets WW, WWS.

#### Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


#### Available to order:

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel sections to 3m long (SS)

**L-** powder coating in a full range of colours (PC)

**Important! In case of large quantity orders available are any sections to 3m long.**

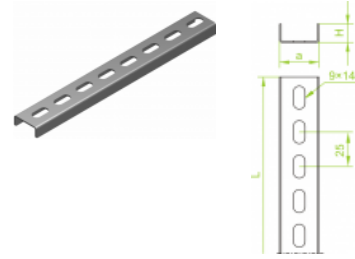

### Versions:

Sheet thickness: **1,2 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
CD28H12/2	2000	28	611320	20	12	0,84
CD28H12/3	3000	28	611330	20	12	1,26

### Connected products:

