

CC28H12... Channel

Overview:

Application

Used for suspending lighting, and as construction element for installing cable trays, and ladders. Used as an element for supporting Brackets WW, WWS.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel sections to 3m long (SS)

L- powder coating in a full range of colours (PC)

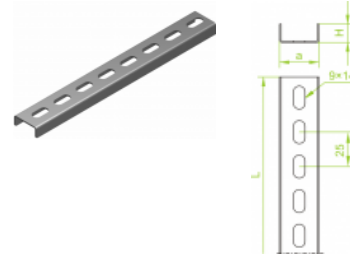

Important! In case of large quantity orders available are any sections to 3m long.

Versions:

Sheet thickness: **2,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
CC28H12/2	2000	28	611520	20	12	1,16
CC28H12/3	3000	28	611530	20	12	1,74

Connected products:

