

CC55H50... Channel

Overview:

Application

Used for suspending lighting, and as construction element for installing cable trays and ladders. Used as an element for Brackets WW, WWS, WS, WSZ, WWC, WMC, WPL, WPT, WMCN, and WWCN.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel sections to 3m long (SS)

L- powder coating in a full range of colours (PC)

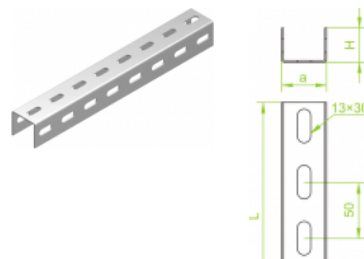

Important! In case of large quantity orders available are any sections up to 3m long. For the assembly of channel in combination with channel connector use Screw Sets SGK M10x20 or SG M10x20

Versions:

Sheet thickness: **2,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
CC55H50/03	300	55	612103	20	50	0,60
CC55H50/04	400	55	612104	20	50	0,81
CC55H50/05	500	55	612105	20	50	1,01
CC55H50/1	1000	55	612110	8	50	2,02
CC55H50/2	2000	55	612120	8	50	4,05
CC55H50/3	3000	55	612130	4	50	6,09

Connected products:



PZC... Assembly
Plate



NO40x20
Protective Cap



NO40x47
Protective Cap



NOK...
Protective Cap



NO80x37
Protective Cap



TSO...
Galvanised Steel
Tape



DSO...
Galvanised Steel
Wire



NO30x30
Protective Cap



NO40x40N
Protective Cap



NO40x60
Protective Cap



DPH... I-Beam



NO40x30
Protective Cap



NO50x30
Protective Cap