

CT55H50... Channel


Overview:

Application
 Used for suspending lighting, and as construction element for installing cable trays and ladders. Used as an element for Brackets WW, WWS, WS, WSZ, WWC, WMC, WPL, WPT, WMCN, and WWCN.

Material
 Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel sections to 3m long (SS)
L- powder coating in a full range of colours (PC)

Important! In case of large quantity orders available are any sections up to 3m long. For the assembly of channel in combination with channel connector use Screw Sets SGK M10×20 or SG M10×20

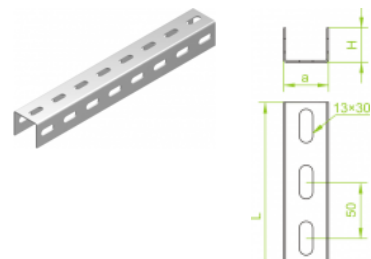

Versions:

Sheet thickness: **3,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
CT55H50/2	2000	55	612220	8	50	5,58
CT55H50/3	3000	55	612230	4	50	8,37
CT55H50/6	6000	55	612260	2	50	16,74

Connected products:

