

CMP40H22... Support Channel

Overview:

Application

Used for suspending lighting, as part of the assembly, and as construction element for installing cable trays, ladders, and Brackets WW, WWS, WS, WSZ, WZS, WWC, WWCN, WMC, WMCN, WPL, WWL, WPT, WTL, and WWT.


Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel sections to 3m and up to 1.5mm thick. (SS)
L- powder coating in a full range of colours (PC)

Important! In case of large quantity orders available are any sections up to 6m long. For the assembly of support channel in combination with channel connector use Screw Sets SGK M8x14 or SG M8x14

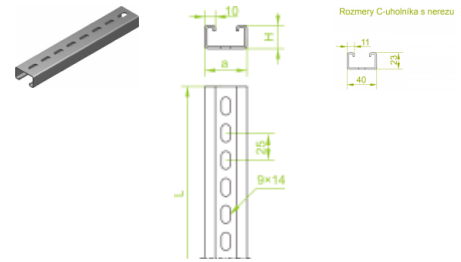

Versions:

Sheet thickness: **1,5 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
CMP40H22/02	200	40	612502	50	22	0,23
CMP40H22/03	300	40	612503	50	22	0,35
CMP40H22/04	400	40	612504	30	22	0,47
CMP40H22/05	500	40	612505	30	22	0,59
CMP40H22/1	1000	40	612510	8	22	1,17
CMP40H22/2	2000	40	612520	8	22	2,34
CMP40H22/3	3000	40	612530	8	22	3,51
CMP40H22/6	6000	40	612560	8	22	7,02

Connected products:

