

CWD30H30... Support Channel


Overview:

Application
Used for suspending lighting, and as an assembly element for installing cable trays, and ladders. Used as an element for supporting Brackets WW, WWS.

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel sections to 3m long (SS)
L- powder coating in a full range of colours (PC)

Important! In case of large quantity orders services available are any sections up to 6m long. For the assembly of support channel in combination with channel connector use Screw Sets SGK M8x14 or SG M8x14.

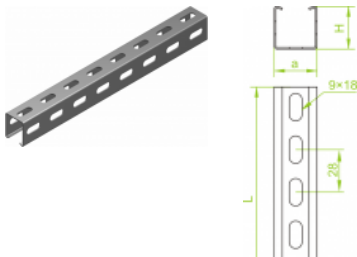

Versions:

Sheet thickness: **1,2 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
CWD30H30/2	2000	30	613520	8	30	1,64
CWD30H30/3	3000	30	613530	8	30	2,46

Connected products:










CWZJ30H20... Support Channel

PCWZJ... Cover For Channel

PTJ... Perforated Steel Band

PZC... Assembly Plate

NO40x20 Protective Cap

NO40x47 Protective Cap

NOK... Protective Cap

NO80x37 Protective Cap










SZB35H7... DIN Rail

SZB35H15... DIN Rail

TSO... Galvanised Steel Tape

DSO... Galvanised Steel Wire

SZP35H7... DIN Rail

SZP35H15... DIN Rail

LCW20H10 Channel Connector

NO30x30 Protective Cap







NO40x40N Protective Cap

NO40x60 Protective Cap

DPH... I-Beam

NO40x30 Protective Cap

NO50x30 Protective Cap