

SZB35H15... DIN Rail

Overview:

Application

For installing all types of DIN Rail-mounted AC circuit breakers (RDs/RCDs/SPDs, GFCIs, etc.), contactors, relays


Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
L- powder coating in a full range of colours (PC)

Production capacity of manufacturing any sections up to 6m long.

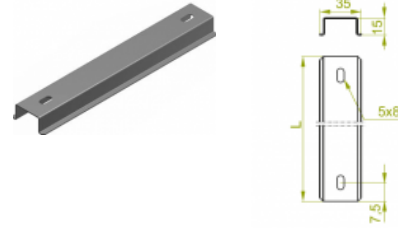

Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
SZB35H15/095	950	35	613495	50	15	0,38
SZB35H15/1	1000	35	613410	50	15	0,40
SZB35H15/2	2000	35	613420	30	15	0,80
SZB35H15/3	3000	35	613430	30	15	1,20

Connected products:

