

WWT... Bracket

Overview:

Application

Supporting cable trays and ladders, pipes, and other systems' components, particularly where installation of cable runs is space restricted (e.g. above a suspended ceiling)

Material


Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

IMPORTANT! Non-standard lengths of brackets available to special order

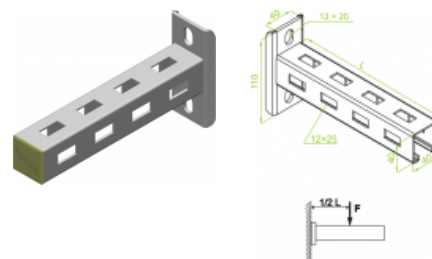

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Weight 1 pc.	Maximum load Fmax[kN]
WWT100	115	711010	30	0,51	3,00
WWT150	165	711015	30	0,60	2,50
WWT200	215	711020	30	0,69	2,00
WWT300	315	711030	30	0,96	1,70
WWT400	415	711040	30	1,15	1,60
WWT500	515	711050	20	1,37	1,40
WWT600	615	711060	10	1,43	1,30
WWT700	715	711070	8	1,82	1,20
WWT800	815	711080	8	1,97	1,10
WWT900	915	711090	8	2,20	1,00
WWT1000	1015	711011	8	2,43	0,90