

WWCN... Bracket

Overview:

APPLICATION

Supporting cable trays and ladders, pipes, and other systems' components under very heavy load

Material


Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

IMPORTANT! Non-standard lengths of brackets available to special order

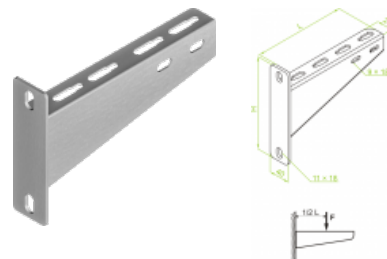

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.	Maximum load Fmax[kN]
WWCN100	115	712110	50	140	0,20	2,00
WWCN200	215	712120	50	140	0,29	1,80
WWCN300	315	712130	20	155	0,47	1,80
WWCN400	415	712140	20	155	0,75	1,80
WWCN500	515	712150	10	170	0,98	1,70
WWCN600	615	712160	10	170	1,10	1,70