

WWD... Bracket

Overview:

Application

nstalling cable trays, ladders, pipes and other components.
Installation with all types of steel profiles 40mm wide.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

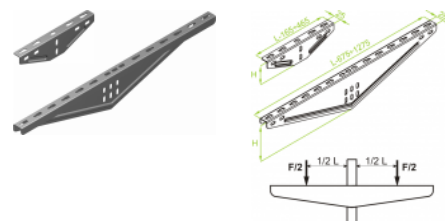

Specially profiled sheet metal trapeze embossing stiffen the joint with channel, only one screw is necessary for connection.

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.	Maximum load Fmax[kN]
WWD50	165	710605	50	50	0,10	1,50
WWD100	265	710610	50	65	0,20	1,80
WWD150	365	710615	50	65	0,26	1,90
WWD200	465	710620	10	72	0,49	2,00
WWD300	675	710630	10	114	1,20	2,30
WWD400	975	710640	10	114	1,60	2,20
WWD500	1075	710650	10	114	1,90	1,90
WWD600	1275	710660	10	114	2,20	1,80