


ZKD... Beam Clamps Set

Overview:

Application
Suspending cable routes

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

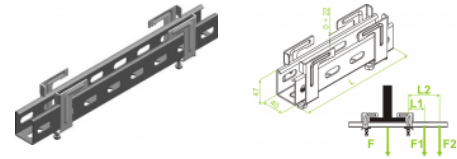

Beam Clamps Set ZKD includes:
 - 2pcs of Beam Clamp KDD
 - proper-length section of Support Channel CWC40H47

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Weight 1 pc.	Maximum load Fmax[kN]	Maximum load F1 [kN]	Maximum load F2 [kN]	A distance between the loaded area and the clamp L1	A distance between the loaded area and the clamp L1
ZKD150	150	751515	10	0,69	5,00	0,00	0,70	100	200
ZKD200	200	751520	10	0,79	4,50	0,00	0,70	100	200
ZKD250	250	751525	10	0,89	4,00	0,00	0,70	100	200
ZKD300	300	751530	10	0,99	3,50	0,00	0,70	100	200
ZKD350	350	751535	10	1,09	3,00	0,00	0,70	100	200
ZKD400	400	751540	10	1,19	2,50	0,00	0,70	100	200