


## WWK... Central Hanger

### Overview:

**Application**  
Suspending cable routes.

**Material**  
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**  
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)  
E- stainless steel (SS)  
L- powder coating in a full range of colours (PC)

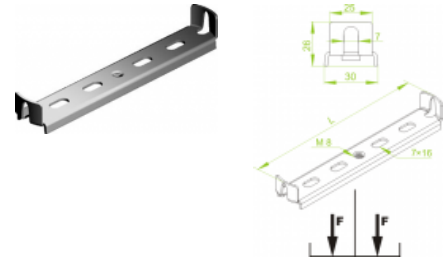

**Possibility of tool free assembly (quick installation) to solid and perforated cable trays**

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.	Maximum load Fmax[kN]
WWK50	47	30	731405	100	28	0,07	0,80
WWK100	97	30	731410	100	28	0,10	0,60
WWK150	147	30	731415	100	28	0,14	0,45
WWK200	197	30	731420	50	28	0,17	0,40
WWK300	297	30	731430	50	28	0,25	0,25

### Connected products:



