


WKW...H50 Central Hanger

Overview:

Application
Suspending cable routes.

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

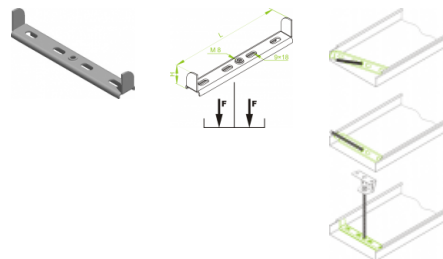

Possibility of tool free assembly (quick installation) to solid and perforated cable trays

Versions:

Sheet thickness: **2,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.	Maximum load F _{max} [kN]
WKW50H50	41	28	731605	100	48	0,08	0,80
WKW100H50	91	28	731610	100	48	0,11	0,60
WKW150H50	141	28	731615	50	48	0,15	0,45
WKW200H50	191	28	731620	50	48	0,18	0,40
WKW300H50	291	28	731630	50	48	0,26	0,25

Connected products:



