


WKW...H60 Central Hanger

Overview:

Application
Suspending cable routes.

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

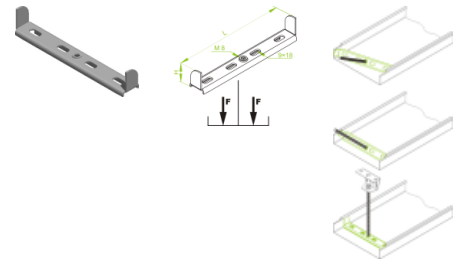

Possibility of tool free assembly (quick installation) to solid and perforated cable trays

Versions:

Sheet thickness: **2,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.	Maximum load Fmax[kN]
WKW100H60	91	28	731710	100	58	0,12	0,60
WKW150H60	141	28	731715	50	58	0,16	0,45
WKW200H60	191	28	731720	50	58	0,19	0,40
WKW300H60	291	28	731730	50	58	0,27	0,25

Connected products:

