


WKW...H80 Central Hanger

Overview:

Application
Suspending cable routes.

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

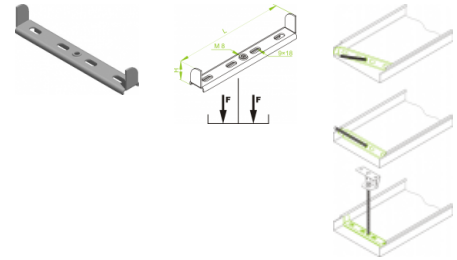

Possibility of tool free assembly (quick installation) to solid and perforated cable trays

Versions:

Sheet thickness: **2,0 mm**

| Symbol | Length L [m] | Width a [mm] | Catalogue number | Quantity in box | Height H [mm] | Weight 1 pc. | Maximum load Fmax[kN] |
|-----------|--------------|--------------|------------------|-----------------|---------------|--------------|-----------------------|
| WKW100H80 | 91 | 28 | 731810 | 50 | 78 | 0,14 | 0,60 |
| WKW150H80 | 141 | 28 | 731815 | 50 | 78 | 0,18 | 0,45 |
| WKW200H80 | 191 | 28 | 731820 | 50 | 78 | 0,21 | 0,40 |
| WKW300H80 | 291 | 28 | 731830 | 50 | 78 | 0,29 | 0,25 |

Connected products:

