


WKW...H100 Central Hanger

Overview:

Application
Suspending cable routes.

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

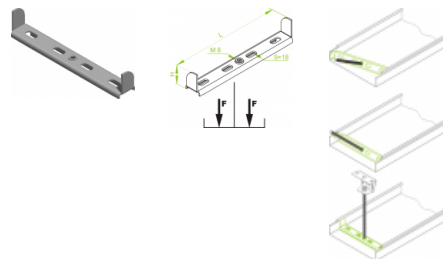

Possibility of tool free assembly (quick installation) to solid and perforated cable trays

Versions:

Sheet thickness: **2,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.	Maximum load Fmax[kN]
WKW100H100	91	28	731910	30	98	0,16	0,60
WKW150H100	141	28	731915	30	98	0,20	0,45
WKW200H100	191	28	731920	30	98	0,23	0,40
WKW300H100	291	28	731930	30	98	0,31	0,25

Connected products:



