

WSV... Bracket

Overview:

Application

Suspending cable routes.


Material

Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

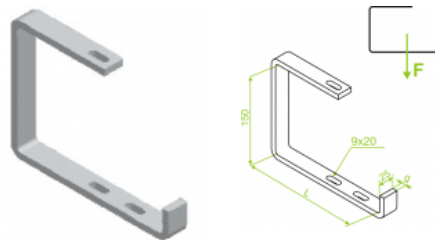

Versions:

Symbol	Length L [m]	Sheet thickness [mm]	Catalogue number	Quantity in box	Weight 1 pc.	Maximum load Fmax[kN]
WSV100	105	6	712210	30	0,39	0,60
WSV150	155	6	712215	20	0,48	0,45
WSV200	205	8	712220	20	0,75	0,40
WSV300	305	10	712230	10	1,26	0,30
WSV400	405	10	712240	10	1,55	0,25