


RKSBJ...H42 Straight Reducer

Overview:

Application
Reducing/extending widths of cable runs

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

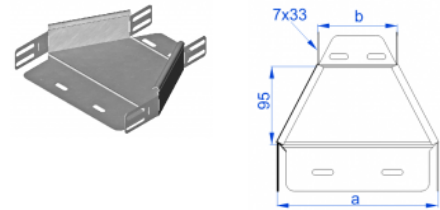

For installation use Screw Sets SGK M6×10 or SG M6×10.
In case of special orders please specify dimensions a and b.

Versions:

Sheet thickness: **1,0 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. | Size b [mm] |
|-----------------|--------------|------------------|-----------------|--------------|-------------|
| RKSBJ100/50H42 | 100 | 146402 | 10 | 0,15 | 50 |
| RKSBJ150/100H42 | 150 | 146502 | 10 | 0,21 | 100 |
| RKSBJ200/100H42 | 200 | 146602 | 10 | 0,25 | 100 |
| RKSBJ200/150H42 | 200 | 146702 | 10 | 0,26 | 150 |
| RKSBJ300/200H42 | 300 | 146902 | 10 | 0,33 | 200 |
| RKSBJ400/300H42 | 400 | 149502 | 10 | 0,40 | 300 |
| RKSBJ500/400H42 | 500 | 149602 | 10 | 0,48 | 400 |
| RKSBJ600/500H42 | 600 | 149702 | 10 | 0,58 | 500 |

Connected products:

