

## KKPP/KKPOP...H60 90° Horizontal Bend

### Overview:

**Application**

Diversions in cable routing.


**Material**

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

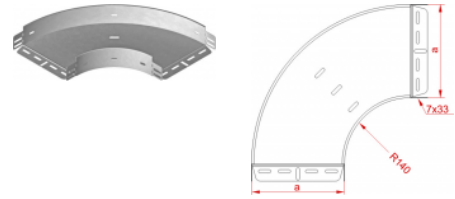

To join the sections up use with the following widths:

- for 100-200mm range - min 12 sets of screw,

- for 300-400mm range - min 14 sets of

Screw SGN M6×12 or SGN M6×12 E

### Versions:

Sheet thickness: 1,5 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKPP/KKPOP100H60	100	160814	20	0,90
KKPP/KKPOP150H60	150	160914	10	1,23
KKPP/KKPOP200H60	200	161014	10	1,60
KKPP/KKPOP300H60	300	161114	10	2,48
KKPP/KKPOP400H60	400	161214	10	3,44
KKPP/KKPOP500H60	500	161314	10	4,81
KKPP/KKPOP600H60	600	161414	10	6,24

### Connected products:



SGN Screw Set