

LDP/LDOP...H60 90° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

For the installation with cable ladders use 2 pairs of LDOCH60N or LDOCH60E with 16 sets of Screw SGN M8×14 or SGN M8×14 E

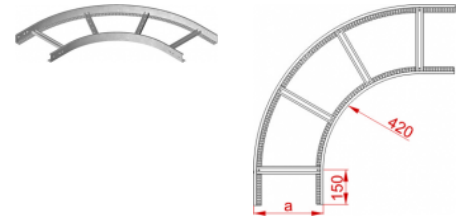

Connected products:



DGOD...H60N
Cable Ladder



DGOD...H60E
Cable Ladder



DGOP...H60N
Cable Ladder



DGOP...H60E
Cable Ladder



LDC/LDOCH60
Straight
Connector



LDOCH60E
Ladder coupler



LGC/LGOCH60
Articulated
Connector



LKDOCH60N
Angle Connector



LKDOCH60E
Angle Connector



ZM/ZMO Hold
Down Clamp



ZMOE Hold
Down Clamp



SGN Screw Set



SM... Screw Set



NS... Nut



PP... Washer



PW... Washer